How to change pollen filter on **Audi A4 B5 Avant** – replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:
AUDI Coupe B3 (89, 8B) 2.3, AUDI Coupe B3 (89, 8B) 2.0, AUDI Coupe B3 (89, 8B) 2.0 16 V, AUDI Coupe B3 (89, 8B) 2.3 20V, AUDI Coupe B3 (89, 8B) 2.6, AUDI Coupe B3 (89, 8B) 2.8, AUDI Coupe B3 (89, 8B) 2.3 quattro, AUDI Coupe B3 (89, 8B) 2.3 20V quattro, AUDI Coupe B3 (89, 8B) S2 quattro, AUDI Coupe B3 (89, 8B) 2.6 quattro, AUDI Coupe B3 (89, 8B) 2.8 quattro, AUDI 80 B4 Saloon (8C2) 1.9 TD, AUDI 80 B4 Saloon (8C2) 1.9 TDI, AUDI 80 B4 Saloon (8C2) 1.6, AUDI 80 B4 Saloon (8C2) 1.6 E, (+ 91)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – AUDI A4 B5 AVANT. TOOLS YOU MIGHT NEED:

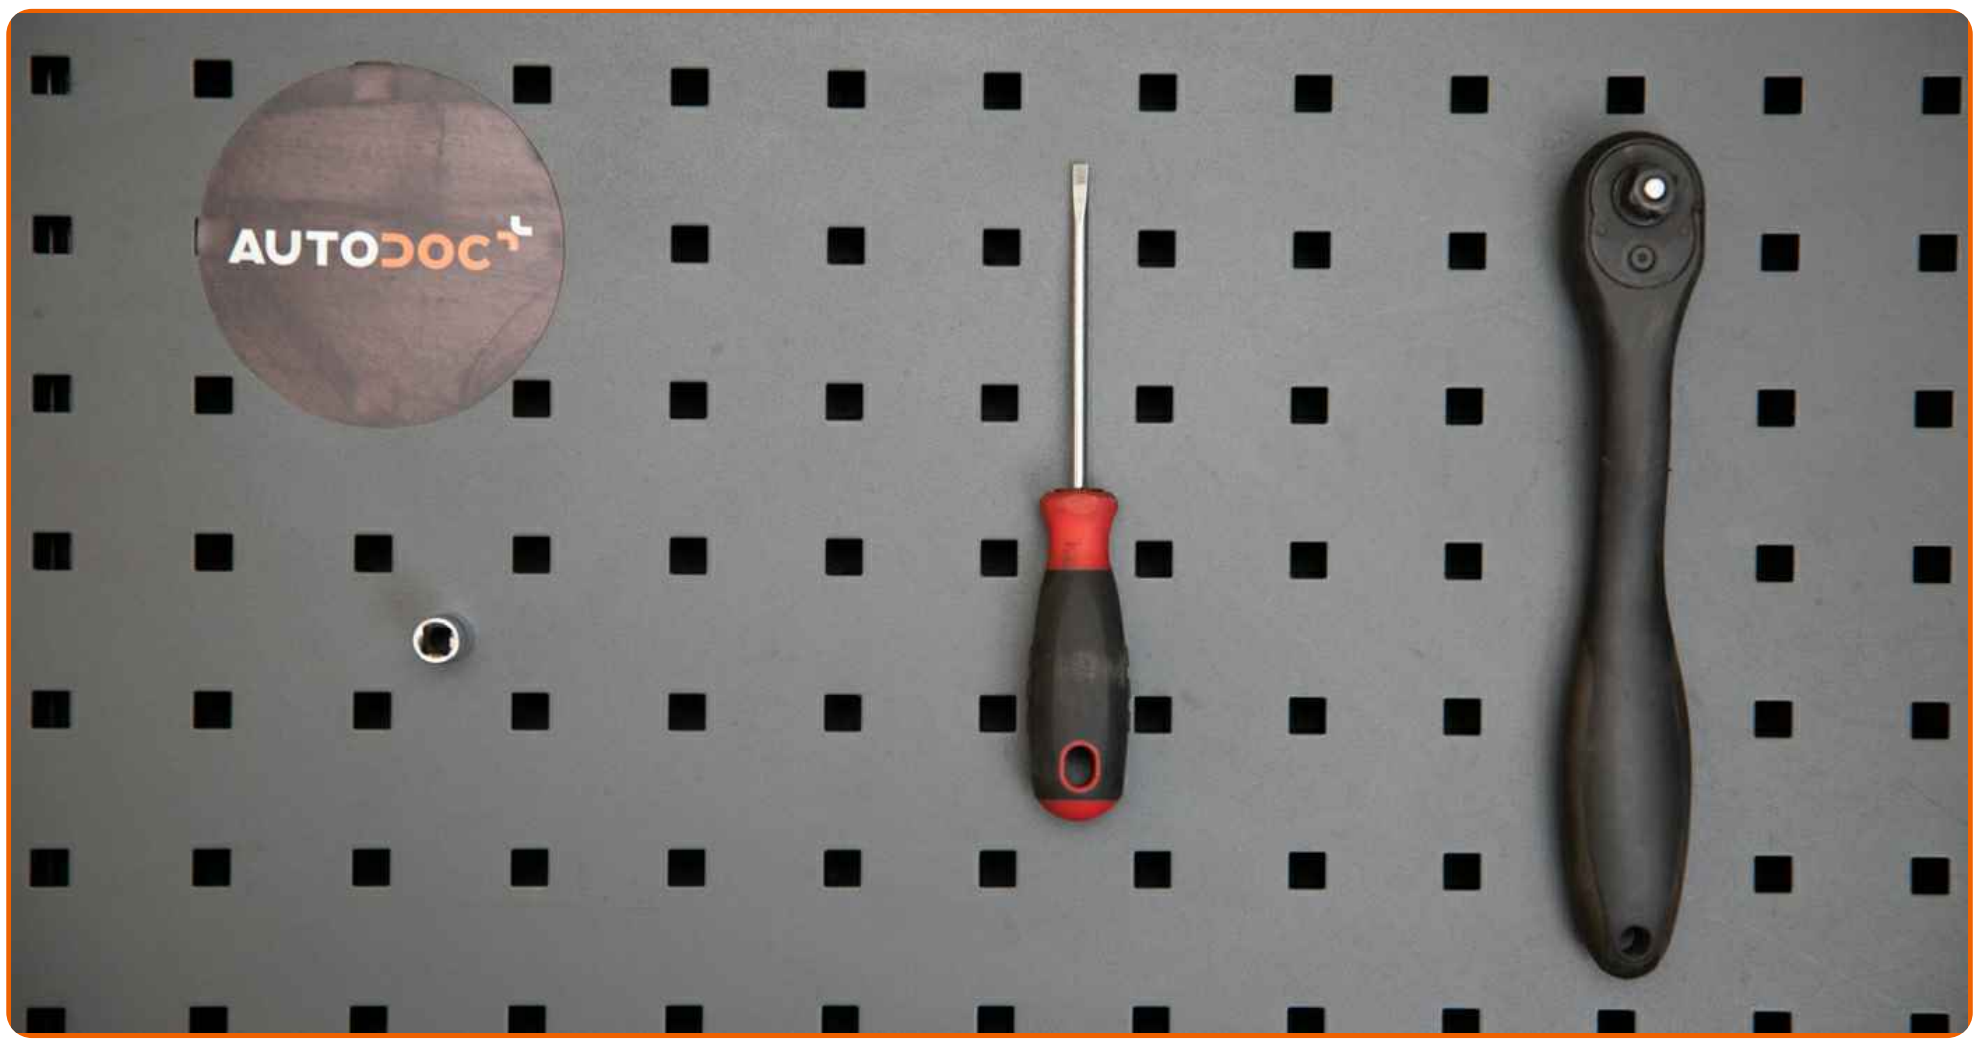

- Drive socket # 8
- Ratchet wrench
- Flat Screwdriver
- Fender cover

BUY TOOLS

Replacement: pollen filter – Audi A4 B5 Avant. AUTODOC recommends:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- All work should be done with the engine stopped.

REPLACEMENT: POLLEN FILTER – AUDI A4 B5 AVANT. USE THE FOLLOWING PROCEDURE:

1 Open the hood.



2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3 Unscrew the fastener of the wiper cowl grille located on the right side. Use a drive socket #8. Use a ratchet wrench.



AUTODOC recommends:

- Replacement: pollen filter – Audi A4 B5 Avant. Do not use excessive force when removing the part as this may damage it.

4 Remove the cowl grille clips. Use a flat screwdriver.



5 Remove the wiper cowl grille located on the right side.



6 Remove the cabin filter housing cover.



7 Remove the cabin filter. Use a flat screwdriver.



Replacement: pollen filter – Audi A4 B5 Avant. AUTODOC recommends:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

8

Install the cabin filter to its mounting seat. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:


- Replacement: pollen filter – Audi A4 B5 Avant. Be sure to position the filtering element correctly. Avoid misalignment.
- Follow the air flow direction arrow on the filter.
- Take care to only use quality filters.

9

Reinstall the cabin filter housing cover. Make sure you hear a click indicating that it is locked in place.



10 Install and secure the wiper cowl grille located on the right side.

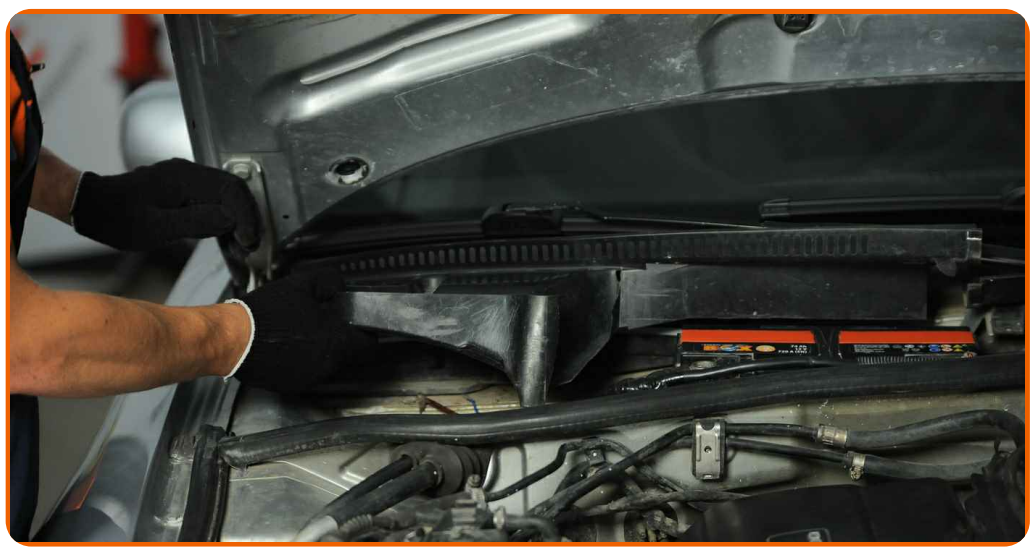

11 Install the cowl grille clips. Use a flat screwdriver.



12 Screw in the fasteners of wiper cowl grille located on the right side. Use a drive socket #8. Use a ratchet wrench.



Replacement: pollen filter – Audi A4 B5 Avant. Tip from AUTODOC experts:

- Do not apply excessive force when installing the part. Otherwise you may damage the fasteners.

13 Remove the fender protection cover.

14 Close the hood.



15 Switch on the ignition.



16 Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

17 Switch off the ignition.

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

CHOOSE CAR PARTS FOR AUDI A4 B5 AVANT

POLLEN FILTER FOR AUDI: BUY NOW

POLLEN FILTER FOR AUDI A4 B5 AVANT: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.